

LIQUID-TIGHT CONNECTOR METALLIC UL MALE

- Ductile cast iron
- Liquid-tight male connector for metallic flexible conduits
- Inside : PA6 Ring and galvanized ferrule
- High corrosion protection
- High vibration and traction resistance
- UL Listed
- With steel locknut




IP65

-45 C

+105 C

Technical Details

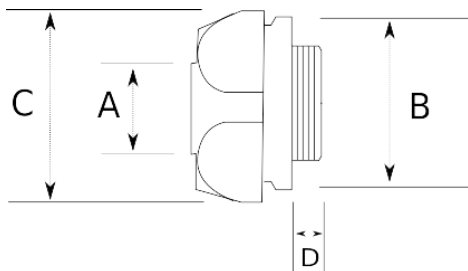

Product Code	Size I	A	B	C	D	E	Net Weight (kg/pc)	In Pack (pc)
L400214	PG13.5	13.00						
L400216	PG16	16.00						
L400221	PG21	21.00						
L400226	PG29	26.00						
L400235	PG36	35.00						
L400240	PG42	40.00		63.20	24.50		0,397	10.00
L400252	PG48	52.00						
L400813	NPT 1/2"	13.00		29.00	14.50			
L400816	NPT 1/2"	16.00		33.50	14.50			
L400821	NPT 3/4"	21.00		41.50	16.00			
L400826	NPT 1"	26.00		46.00	19.50			
L400835	NPT 1 1/4"	35.00		55.50	20.50			
L400840	NPT 1 1/2"	40.00		63.20	24.50			
L400852	NPT 2"	52.00		76.00	27.00			
L400863	NPT 2 1/2"	63.00		99.20	36.50			
L400878	NPT 3"	78.00		118.30	38.00			
L400902	NPT 4"	102.00		145.30	41.00			



"Your Conduit Partner"

--	--	--	--	--	--	--	--	--	--