


LIQUID-TIGHT CONNECTOR BRASS FEMALE



- material : brass
- Brass nickel plated core and cover
- Liquid-tight female connector for metallic flexible conduits
- Inside : PA6 Ring and galvanized ferrule
- High corrosion protection
- High vibration and traction resistance
- Metric EN60423, PG DIN 40430, NPT ANSI B1 20 1

Technical Details

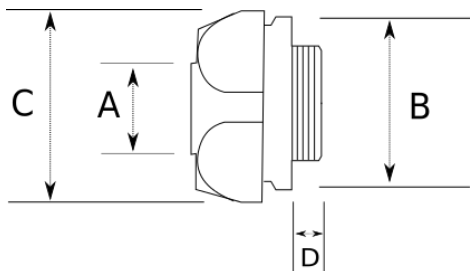

IP65	-45 C	+105 C
------	-------	--------

Product Code	Size I	A	B	C	D	E	F	Net Weight (kg/pc)	In Pack (pc)
L620406	M12x1.5	6.00							
L620408	M12x1.5	8.00							
L620410	M16x1.5	10.00		22.00					
L620412	M16x1.5	12.50		26.00					
L620416	M20x1.5	16.00		30.00				0,067	50.00
L620421	M25x1.5	21.00		35.00					
L620426	M32x1.5	26.00		45.00					
L620435	M40x1.5	35.00		54.00					
L620440	M50x1.5	40.00		61.50				0,415	4.00
L620452	M63x1.5	52.00		76.00					
L620610	1/4"	10.00		22.00					
L620613	1/2"	12.50		26.00				0,033	100.00
L620616	1/2"	16.00		30.00				0,058	50.00
L620621	3/4"	21.00		35.00				0,068	50.00
L620626	1"	26.00		45.00				0,155	20.00
L620635	1 1/4"	35.00		54.00				0,212	20.00
L620640	1 1/2"	40.00		61.50				0,279	12.00

L620652	2"	52.00		76.00				0,451	8.00
L620663	2 1/2"	63.00							
L620678	3"	78.00							
L620702	4"	102.00							
L620816	NPT 1/2"	16.00		30.00					
L620821	NPT 3/4"	21.00		35.00				0,085	40.00
L620826	NPT 1"	26.00		45.00				0,151	20.00
L620835	NPT 1 1/4"	35.00		54.00					
L620840	NPT 1 1/2"	40.00		61.50				0,330	12.00
L620852	NPT 2"	52.00		76.00				0,485	8.00
L620863	NPT 2 1/2"	63.00							
L620878	NPT 3"	78.00	109.00	109.00	25.00			1,791	2.00
L620902	NPT 4"	102.00							
L621617	3/4"	16.00		30.00					
L621622	1"	21.00		35.00					