


LIQUID-TIGHT CONNECTOR METALLIC UL 45



- material : hot-dip galvanized
- standard : UL514B
- Ductile cast iron
- Liquid-tight 45 angle connector for metallic flexible conduits
- Inside : PA6 Ring and galvanized ferrule
- High corrosion protection
- High vibration and traction resistance
- With locknut

Technical Details

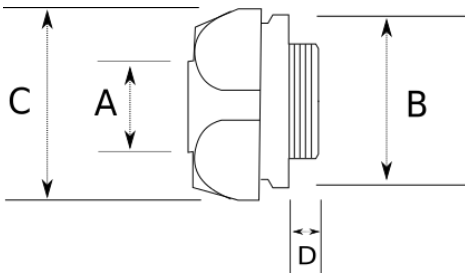

IP65	-45 C	+105 C
------	-------	--------

Product Code	Size I	A	B	C	D	E	F	Net Weight (kg/pc)	In Pack (pc)
L440235	PG36	35.00						0,408	10.00
L440813	NPT 1/2"	12.50						0,091	50.00
L440816	NPT 1/2"	16.00						0,121	40.00
L440821	NPT 3/4"	21.00						0,195	30.00
L440826	NPT 1"	26.00						0,283	15.00
L440835	NPT 1 1/4"	35.00							
L440840	NPT 1 1/2"	40.00							
L440852	NPT 2"	52.00							
L440863	NPT 2 1/2"	63.00							
L440878	NPT 3"	78.00							
L440902	NPT 4"	102.00							