


LIQUID-TIGHT CONNECTOR METALLIC FEMALE



- material : die cast zinc

- Die cast zinc
- Liquid-tight female connector for metallic flexible conduits
- Inside : PA6 Ring and galvanized ferrule
- High corrosion protection
- High vibration and traction resistance

Technical Details

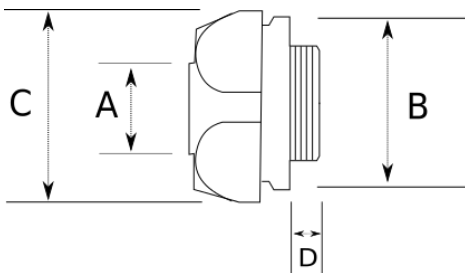

IP65	-25 C	+70 C
------	-------	-------

Product Code	Size I	A	B	C	D	E	F	Net Weight (kg/pc)	In Pack (pc)
L320613	1/2"	12.50						0,035	100.00
L320616	1/2"	16.00						0,044	80.00
L320621	3/4"	21.00						0,063	50.00
L320626	1"	26.00						0,094	25.00
L320635	1 1/4"	35.00						0,139	20.00
L320640	1 1/2"	40.00						0,203	12.00
L320652	2"	52.00						0,291	8.00
L320663	2 1/2"	63.00						0,661	4.00
L320678	3"	78.00						0,863	3.00
L320702	4"	102.00							