




- material : stainless steel

- Stainless steel core (SS304)
- Male connector for stainless steel conduits
- O-ring: NBR
- Ring and Plug: Polyamide 6 (PA6)
- Ferrule : Stainless Steel (SS304)
- Provides high protection against outdoor conditions
- When used with LT, LD or SLT model steel flexible conduit, it will be IP67 rated
- High corrosion protection
- High vibration and traction resistance
- T7400 stainless steel lock-nut is not included

### Technical Details

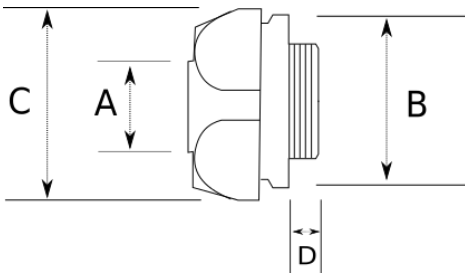

IP65	-45 C	+105 C
------	-------	--------

Product Code	Size I	A	B	C	D	E	F	Net Weight (kg/pc)	In Pack (pc)
S700613	3/8"	12.50							
S700616	1/2"	16.00						0,098	50.00
S700621	3/4"	21.00						0,136	25.00
S700626	1"	26.00						0,156	25.00
S700635	1 1/4"	35.00							
S700640	1 1/2"	40.00							
S700652	2"	52.00							