



Liquid-Tight Female Connector

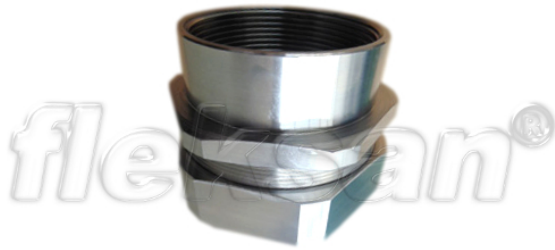

- material : stainless steel
- standard : EN60423 UL-514B
- Stainless steel core (316L)
- Female connector for flexible steel conduits
- O-ring: NBR
- Ring and Plug: Polyamide 6 (PA6)
- Ferrule : Stainless Steel (316L)
- Provides high protection against outdoor conditions, oils, and acids
- When used with LT, LD or SLT model steel flexible conduit, it will be IP67 rated
- High corrosion protection
- High vibration and traction resistance

Technical Details

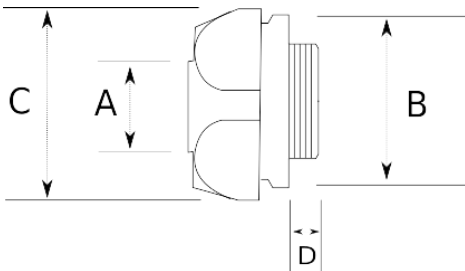

IP65	-45 C	+105 C
------	-------	--------

Product Code	Size I	A	B	C	D	E	F	Net Weight (kg/pc)	In Pack (pc)
S726810	NPT 1/4"	10.00							50.00
S726813	NPT 1/2"	12.50							50.00
S726816	NPT 1/2"	16.00							25.00
S726821	NPT 3/4"	21.00							25.00
S726826	NPT 1"	26.00							20.00
S726835	NPT 1 1/4"	35.00							10.00
S726840	NPT 1 1/2"	40.00							10.00
S726852	NPT 2"	52.00							5.00