


Liquid-Tight 45 Degree Connector



- material : stainless steel
- standard : EN60423 UL-514B
- Stainless steel core (316L)
- 45 degree male connector for flexible steel conduits
- O-ring: NBR
- Ring and Plug: Polyamide 6 (PA6)
- Ferrule : Stainless Steel (316L)
- Provides high protection against outdoor conditions, oils, and acids
- When used with LT, LD or SLT model steel flexible conduit, it will be IP67 rated
- High corrosion protection
- High vibration and traction resistance
- T7400 stainless steel lock-nut is not included

Technical Details

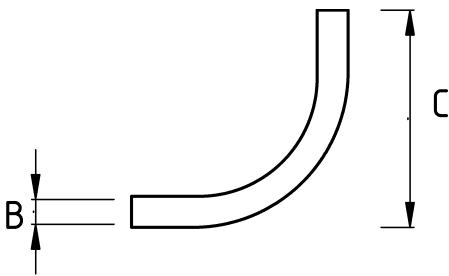

IP65	-45 C	+105 C
------	-------	--------

Product Code	Size I	A	B	C	D	E	F	Net Weight (kg/pc)	In Pack (pc)
S746413	M20x1.5	12.50							
S746416	M20x1.5	16.00							
S746421	M25x1.5	21.00							
S746426	M32x1.5	26.00							
S746435	M40x1.5	35.00							
S746440	M50x1.5	40.00							
S746452	M63x1.5	52.00							
S746816	NPT 1/2"	16.00							
S746821	NPT 3/4"	21.00							
S746826	NPT 1"	26.00							
S746835	NPT 1 1/4"	35.00							
S746840	NPT 1 1/2"	40.00							
S746852	NPT 2"	52.00							