


LIQUID-TIGHT CONNECTOR METALLIC UL FEMALE



- material : hot-dip galvanized
- standard : UL514B

- Ductile cast iron
- Liquid-tight female connector for metallic flexible conduits
- Inside : PA6 Ring and galvanized ferrule
- High corrosion protection
- High vibration and traction resistance
- UL Listed

Technical Details

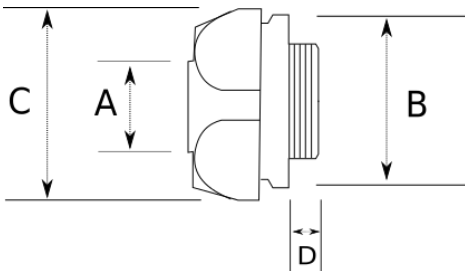

IP65	-45 C	+105 C
------	-------	--------

Product Code	Size I	A	B	C	D	E	F	Net Weight (kg/pc)	In Pack (pc)
L420816	NPT 1/2"	16.00		33.50	12.50				
L420821	NPT 3/4"	21.00		41.50	14.00				
L420826	NPT 1"	26.00		46.00	17.50				
L420835	NPT 1 1/4"	35.00		55.50	18.00				
L420840	NPT 1 1/2"	40.00		63.20	21.50				
L420852	NPT 2"	52.00		76.00	24.00				
L420863	NPT 2 1/2"	63.00		99.20	33.50				
L420878	NPT 3"	78.00		118.30	35.00				
L420902	NPT 4"	102.00		145.30	38.00				