


Liquid-Tight 90 Degree Connector



- material : stainless steel
- standard : EN60423 UL-514B
- Stainless steel core (316L)
- 90 degree male connector for flexible steel conduits
- O-ring: NBR
- Ring and Plug: Polyamide 6 (PA6)
- Ferrule : Stainless Steel (316L)
- Provides high protection against outdoor conditions, oils, and acids
- When used with LT, LD or SLT model steel flexible conduit, it will be IP67 rated
- High corrosion protection
- High vibration and traction resistance
- T7400 stainless steel lock-nut is not included

Technical Details

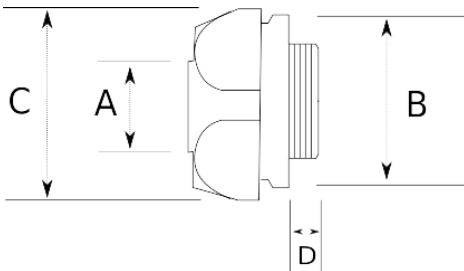

IP65	-45 C	+105 C
------	-------	--------

Product Code	Size I	A	B	C	D	E	F	Net Weight (kg/pc)	In Pack (pc)
S796410	M16x1.5	10.00							
S796412	M16x1.5	12.50							
S796413	M20x1.5	12.50							
S796416	M20x1.5	16.00		54.50					
S796421	M25x1.5	21.00		65.00					
S796426	M32x1.5	26.00		73.00					
S796435	M40x1.5	35.00							
S796440	M50x1.5	40.00							
S796452	M63x1.5	52.00							
S796813	NPT 1/2"	12.50							
S796816	NPT 1/2"	16.00							
S796821	NPT 3/4"	21.00							
S796826	NPT 1"	26.00							
S796835	NPT 1 1/4"	35.00							
S796840	NPT 1 1/2"	40.00							
S796852	NPT 2"	52.00							