




• material : brass

- Brass nickel plated core and cover
- Liquid-tight swivel type female connector for metallic flexible conduits
- Inside : PA6 Ring and galvanized ferrule
- High corrosion protection
- High vibration and traction resistance

Technical Details

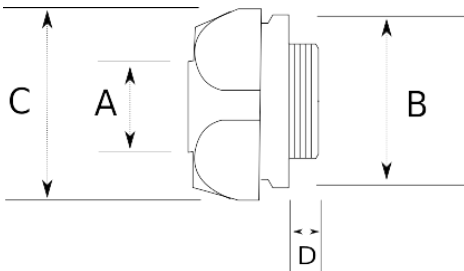

IP65	-45 C	+105 C
------	-------	--------

Product Code	Size I	A	B	C	D	E	F	Net Weight (kg/pc)	In Pack (pc)
L623416	M20x1.5	16.00		30.00					
L623417	M25x1.5	16.00		30.00					
L623421	M25x1.5	21.00		35.00					
L623426	M32x1.5	26.00		45.00					
L623435	M40x1.5	35.00		54.00					
L623440	M50x1.5	40.00		61.50					
L623452	M63x1.5	52.00		76.00					
L623616	1/2"	16.00		30.00					
L623621	3/4"	21.00		35.00				0,097	50.00
L623622	1"	21.00		35.00					
L623625	3/4"	26.00		45.00				0,191	20.00
L623626	1"	26.00		45.00				0,179	20.00
L623635	1 1/4"	35.00		54.00					
L623640	1 1/2"	40.00		61.50					
L623652	2"	52.00		76.00					
L623663	2 1/2"	63.00							
L623678	3"	78.00							



L6230

LIQUID-TIGHT CONNECTOR BRASS FEMALE SWIVEL

"Your Conduit Partner"

L623702	4"	102.00							
L623725	5"	125.00							
L623750	6"	150.00							