




• material : brass

- Brass nickel plated core and cover
- Liquid-tight swivel type male connector for metallic flexible conduits
- Inside : PA6 Ring and galvanized ferrule
- High corrosion protection
- High vibration and traction resistance
- Suitable with T6400 series locknuts

Technical Details

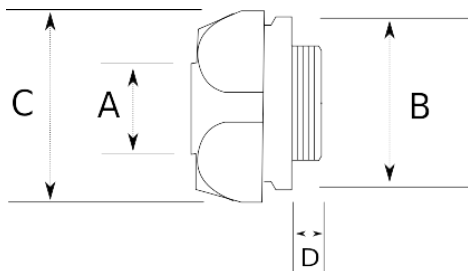

IP65	-45 C	+105 C
------	-------	--------

Product Code	Size I	A	B	C	D	E	F	Net Weight (kg/pc)	In Pack (pc)
L603210	PG9	10.00	20.00	22.00				0,038	100.00
L603212	PG11	12.50	24.00	26.00				0,053	80.00
L603213	PG13.5	12.50	24.00	26.00				0,063	60.00
L603215	PG13.5	16.00	28.00	30.00				0,077	50.00
L603216	PG16	16.00	28.00	30.00				0,080	60.00
L603221	PG21	21.00	34.00	35.00	11.50			0,110	40.00
L603226	PG29	26.00	42.00	45.00				0,196	15.00
L603235	PG36	35.00		54.00					
L603240	PG42	40.00		61.50					
L603252	PG48	52.00		76.00					
L603410	M16x1.5	10.00	20.00	22.00				0,042	100.00
L603412	M16x1.5	12.50	24.00	26.00				0,055	80.00
L603413	M20x1.5	12.50	24.00	26.00					
L603416	M20x1.5	16.00	28.00	30.00				0,080	50.00
L603421	M25x1.5	21.00	34.00	35.00				0,097	25.00
L603425	M25x1.5	26.00							20.00
L603426	M32x1.5	26.00	42.00	45.00				0,204	20.00

L603435	M40x1.5	35.00		54.00					
L603440	M50x1.5	40.00		61.50				0,409	6.00
L603452	M63x1.5	52.00		76.00					
L603610	1/4"	10.00	20.00	22.00					
L603612	3/8"	12.50	24.00	26.00				0,062	60.00
L603613	1/2"	12.50	24.00	26.00				0,064	60.00
L603616	1/2"	16.00	28.00	30.00				0,076	40.00
L603621	3/4"	21.00	34.00	35.00				0,114	40.00
L603626	1"	26.00	42.00	45.00				0,197	20.00
L603635	1 1/4"	35.00		54.00					
L603640	1 1/2"	40.00		61.50				0,385	10.00
L603652	2"	52.00		76.00				0,651	6.00
L603663	2 1/2"	63.00							
L603813	NPT 3/8"	12.50	24.00	26.00					
L603816	NPT 1/2"	16.00	28.00	30.00					
L603821	NPT 3/4"	21.00	34.00	35.00					
L603826	NPT 1"	26.00	42.00	45.00					
L603835	NPT 1 1/4"	35.00		54.00					
L603840	NPT 1 1/2"	40.00		61.50					
L603852	NPT 2"	52.00		76.00					
L603863	NPT 2 1/2"	63.00							
L603878	NPT 3"	78.00							
L603902	NPT 4"	102.00							