


LIQUID-TIGHT CONNECTOR METALLIC UL MALE



- material : electro galvanized
- standard : UL514B
- Ductile cast iron
- Liquid-tight male connector for metallic flexible conduits
- Inside : PA6 Ring and galvanized ferrule
- High corrosion protection
- High vibration and traction resistance
- UL Listed
- With steel locknut

Technical Details

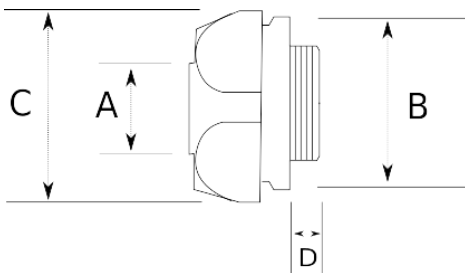

IP65	-45 C	+105 C
------	-------	--------

Product Code	Size I	A	B	C	D	E	F	Net Weight (kg/pc)	In Pack (pc)
L400214	PG13.5	12.50							
L400216	PG16	16.00							
L400221	PG21	21.00							
L400226	PG29	26.00							
L400235	PG36	35.00						0,380	10.00
L400240	PG42	40.00		63.20	24.50			0,397	10.00
L400252	PG48	52.00							
L400813	NPT 1/2"	12.50		29.00	14.50				
L400816	NPT 1/2"	16.00		33.50	14.50				
L400821	NPT 3/4"	21.00		41.50	16.00				
L400826	NPT 1"	26.00		46.00	19.50				
L400835	NPT 1 1/4"	35.00		55.50	20.50				
L400840	NPT 1 1/2"	40.00		63.20	24.50				
L400852	NPT 2"	52.00		76.00	27.00				
L400863	NPT 2 1/2"	63.00		99.20	36.50				
L400878	NPT 3"	78.00		118.30	38.00				
L400902	NPT 4"	102.00		145.30	41.00				



"Your Conduit Partner"

--	--	--	--	--	--	--	--	--	--	--