

EX-PROOF BLIND PLUG, BRASS

- Brass nickel plated core
- ATEX II 2GD Ex db IIC Gb ; Ex eb IIC Gb, IP66/68




IP68

-40 C

+100 C

Technical Details

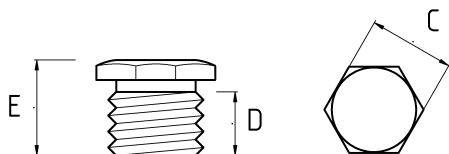

Product Code	Size I	A	B	C	D	E	Net Weight (kg/pc)	In Pack (pc)
V630209	PG9			20.00	16.50			
V630211	PG11			25.00	16.50			
V630213	PG13.5			25.00	16.50		0,040	100.00
V630216	PG16			27.00	16.50		0,045	100.00
V630221	PG21			35.00	17.00		0,061	50.00
V630229	PG29			42.00	17.00		0,089	40.00
V630236	PG36			55.00	17.00		0,151	20.00
V630242	PG42			60.00	17.00			
V630248	PG48			65.00	17.00			
V630416	M16x1.5			22.00	15.50		0,029	100.00
V630420	M20x1.5			25.00	15.50		0,037	100.00
V630425	M25x1.5			30.00	15.50		0,049	80.00
V630432	M32x1.5			37.00	15.50		0,069	50.00
V630440	M40x1.5			45.00	17.50		0,107	40.00
V630450	M50x1.5			55.00	17.50		0,149	30.00
V630463	M63x1.5			70.00	17.50		0,220	20.00
V630475	M75x1.5			85.00	20.00			

V630813	NPT 3/8"			20.00	16.00			
V630816	NPT 1/2"			24.00	18.00		0,041	50.00
V630821	NPT 3/4"			28.00	18.00		0,053	50.00
V630826	NPT 1"			35.00	21.00			
V630835	NPT 1 1/4"			45.00	21.00			
V630840	NPT 1 1/2"			50.00	21.00			
V630852	NPT 2"			65.00	21.00			