


LIQUID-TIGHT COUPLING METALLIC

fleksan®

• material : die cast zinc

- Die cast zinc
- Liquid-tight coupling for metallic flexible conduits
- Inside : PA6 Ring and galvanized ferrule
- High corrosion protection
- High vibration and traction resistance

Technical Details

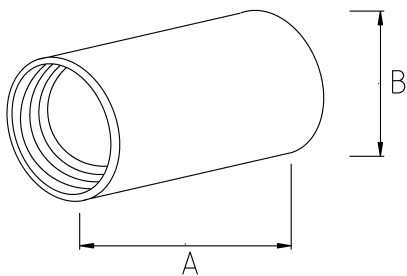

IP65	-25 C	+70 C
------	-------	-------

Product Code	Size I	A	B	C	D	E	F	Net Weight (kg/pc)	In Pack (pc)
L350616	1/2"	16.00							
L350621	3/4"	21.00							
L350626	1"	26.00							
L350635	1 1/4"	35.00							
L350640	1 1/2"	40.00							
L350652	2"	52.00							
L350663	2 1/2"	63.00						0,831	2.00
L350678	3"	78.00							
L350702	4"	102.00							