

LIQUID-TIGHT CONNECTOR BRASS SILOK TYPE

- Brass nickel plated core and cover
- Liquid-tight male connector for metallic flexible conduits and cable gland
- Inside : PA6 Ring and galvanized ferrule
- High corrosion protection
- High vibration and traction resistance
- Suitable with T6400 series locknuts




IP65

-45 C

+105 C

Technical Details

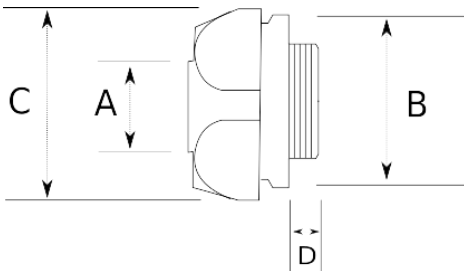

Product Code	Size I	A	B	C	D	E	Net Weight (kg/pc)	In Pack (pc)
L680215	PG13.5	16.00	6.00	12.00			0,090	25.00
L680216	PG16	16.00	6.00	12.00				
L680240	PG42	40.00	30.00	38.00				
L680410	M20x1.5	10.00	4.00	8.00			0,055	80.00
L680416	M20x1.5	15.50	6.00	12.00			0,093	40.00
L680421	M25x1.5	21.00	13.00	18.00			0,146	25.00
L680426	M32x1.5	26.00	18.00	25.00			0,222	20.00
L680435	M40x1.5	35.00	22.00	32.00				
L680616	1/2"	15.50	6.00	12.00				
L680621	3/4"	21.00	13.00	18.00				
L680626	1"	26.00	18.00	25.00				
L680635	1 1/4"	35.00						
L680640	1 1/2"	40.00						
L680652	2"	52.00						
L680663	2 1/2"	63.00						
L680678	3"	78.00						
L680702	4"	102.00						

L680816	NPT 1/2"	16.00						
L680821	NPT 3/4"	21.00						
L680826	NPT 1"	26.00						
L680835	NPT 1 1/4"	35.00						
L680840	NPT 1 1/2"	40.00						
L680852	NPT 2"	52.00						