


EX-PROOF BRASS CABLE GLAND A2F



- материал : латунный
- стандарт : IEC 60079
- никелированная латунь
- без контрагайки
- Presafe 20 ATEX 48906X
- Ex db IIC Gb; Ex eb IIC Gb; Ex tb IIIC Db, IP66/68

Технические характеристики

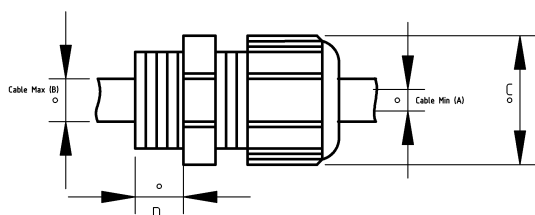

IP68

-55 C

+160 C

Код продукта	Размер I	A	B	C	D	E	F	Вес нетто (kg/шт)	Количество в
V606419	M20x1.5	3.20	8.50		17.00			0,079	50.00
V606420	M20x1.5	6.20	11.60		17.00			0,072	50.00
V606421	M20x1.5	8.00	13.90		17.00				
V606425	M25x1.5	11.20	19.60		17.00			0,125	30.00
V606432	M32x1.5	17.10	26.00		17.00			0,163	20.00
V606440	M40x1.5	23.60	31.60		17.00			0,222	16.00
V606450	M50x1.5	31.10	37.50		17.00				
V606451	M50x1.5	35.70	43.10		17.00			0,290	12.00
V606463	M63x1.5	41.60	48.70		17.00				
V606464	M63x1.5	47.30	55.20		17.00			0,451	8.00
V606475	M75x1.5	54.10	61.20		17.00				
V606476	M75x1.5	61.20	67.20		17.00				
V606490	M90x1.5	66.70	79.20		24.00				
V606815	NPT 1/2"	3.20	8.50		20.00				
V606816	NPT 1/2"	6.20	11.60		20.00				
V606817	NPT 1/2"	8.00	13.90		20.00				
V606821	NPT 3/4"	11.20	19.60		21.00				

V606826	NPT 1"	17.10	26.00		26.00				
V606835	NPT 1 1/4"	23.60	31.60		26.00				
V606840	NPT 1 1/2"	31.10	37.50		26.00				
V606852	NPT 2"	35.70	43.10		27.00				
V606853	NPT 2"	41.60	48.70		27.00				
V606863	NPT 2 1/2"	47.30	55.20		40.00				
V606864	NPT 2 1/2"	54.10	61.20		40.00				
V606878	NPT 3"	61.20	67.20		42.00				