


Nylon Cable Glands Dome Top



- material : nylon 6
- standard : EN62444 UL514B
- color : 9005
- Polyamide PA6 core
- CR (Chloroprene) seal
- Flammability: V2 according to UL94
- Best performance for standard industrial applications
- Nylon Cable Glands are great for use in solar power energy systems, electrical equipments and electrical machines
- With T1400 polyamide locknut
- UL Listed
- Color : Black

Technical Details

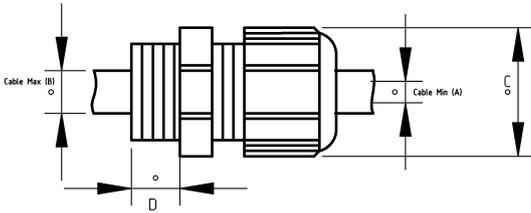

IP68	-20 C	+100 C
------	-------	--------

Product Code	Size I	A	B	C	D	E	F	Net Weight (kg/pc)	In Pack (pc)
T109207	PG7	3.00	6.00	15.00	8.00			0,005	300.00
T109209	PG9	4.00	8.00	19.00	8.00			0,007	200.00
T109211	PG11	5.00	10.00	22.00	8.00			0,010	100.00
T109213	PG13.5	6.00	12.00	24.00	10.00			0,013	100.00
T109216	PG16	10.00	14.00	27.00	10.00			0,015	100.00
T109221	PG21	13.00	18.00	33.00	11.00			0,027	50.00
T109229	PG29	18.00	25.00	42.00	11.00			0,043	30.00
T109236	PG36	22.00	32.00	53.00	13.00			0,078	12.00
T109242	PG42	30.00	38.00	60.00	13.00			0,103	8.00
T109248	PG48	34.00	44.00	65.00	14.00			0,114	8.00
T109412	M12x1.5	3.00	6.00	15.00	8.00			0,004	300.00
T109416	M16x1.5	5.00	10.00	22.00	10.00			0,011	100.00
T109420	M20x1.5	6.00	12.00	24.00	10.00			0,013	100.00
T109421	M20x1.5	10.00	14.00	27.00	10.00			0,016	100.00
T109424	M25x1.5	9.00	13.00	29.00	8.00			0,202	50.00
T109425	M25x1.5	13.00	18.00	33.00	10.00			0,026	60.00
T109432	M32x1.5	18.00	25.00	42.00	15.00			0,043	30.00

"Your Conduit Partner"

T109439	M40x1.5	19.00	28.00	46.00	18.00				
T109440	M40x1.5	22.00	32.00	53.00	18.00			0,079	18.00
T109450	M50x1.5	30.00	38.00	60.00	18.00			0,104	10.00
T109463	M63x1.5	34.00	44.00	65.00	18.00			0,124	6.00
T109813	NPT 3/8"	5.00	10.00	22.00	15.00				
T109816	NPT 1/2"	10.00	14.00	27.00	15.00			0,017	80.00
T109821	NPT 3/4"	13.00	18.00	33.00	15.00			0,028	50.00
T109826	NPT 1"	18.00	25.00	42.00	18.00			0,044	20.00